




.....	5
.....	5
.....	5
.....	5
.....	5
.....	6
.....	7
-	7
-	8
-	9
-	

		25
Json	python	26
		26
		27
		28
Python		28
		28

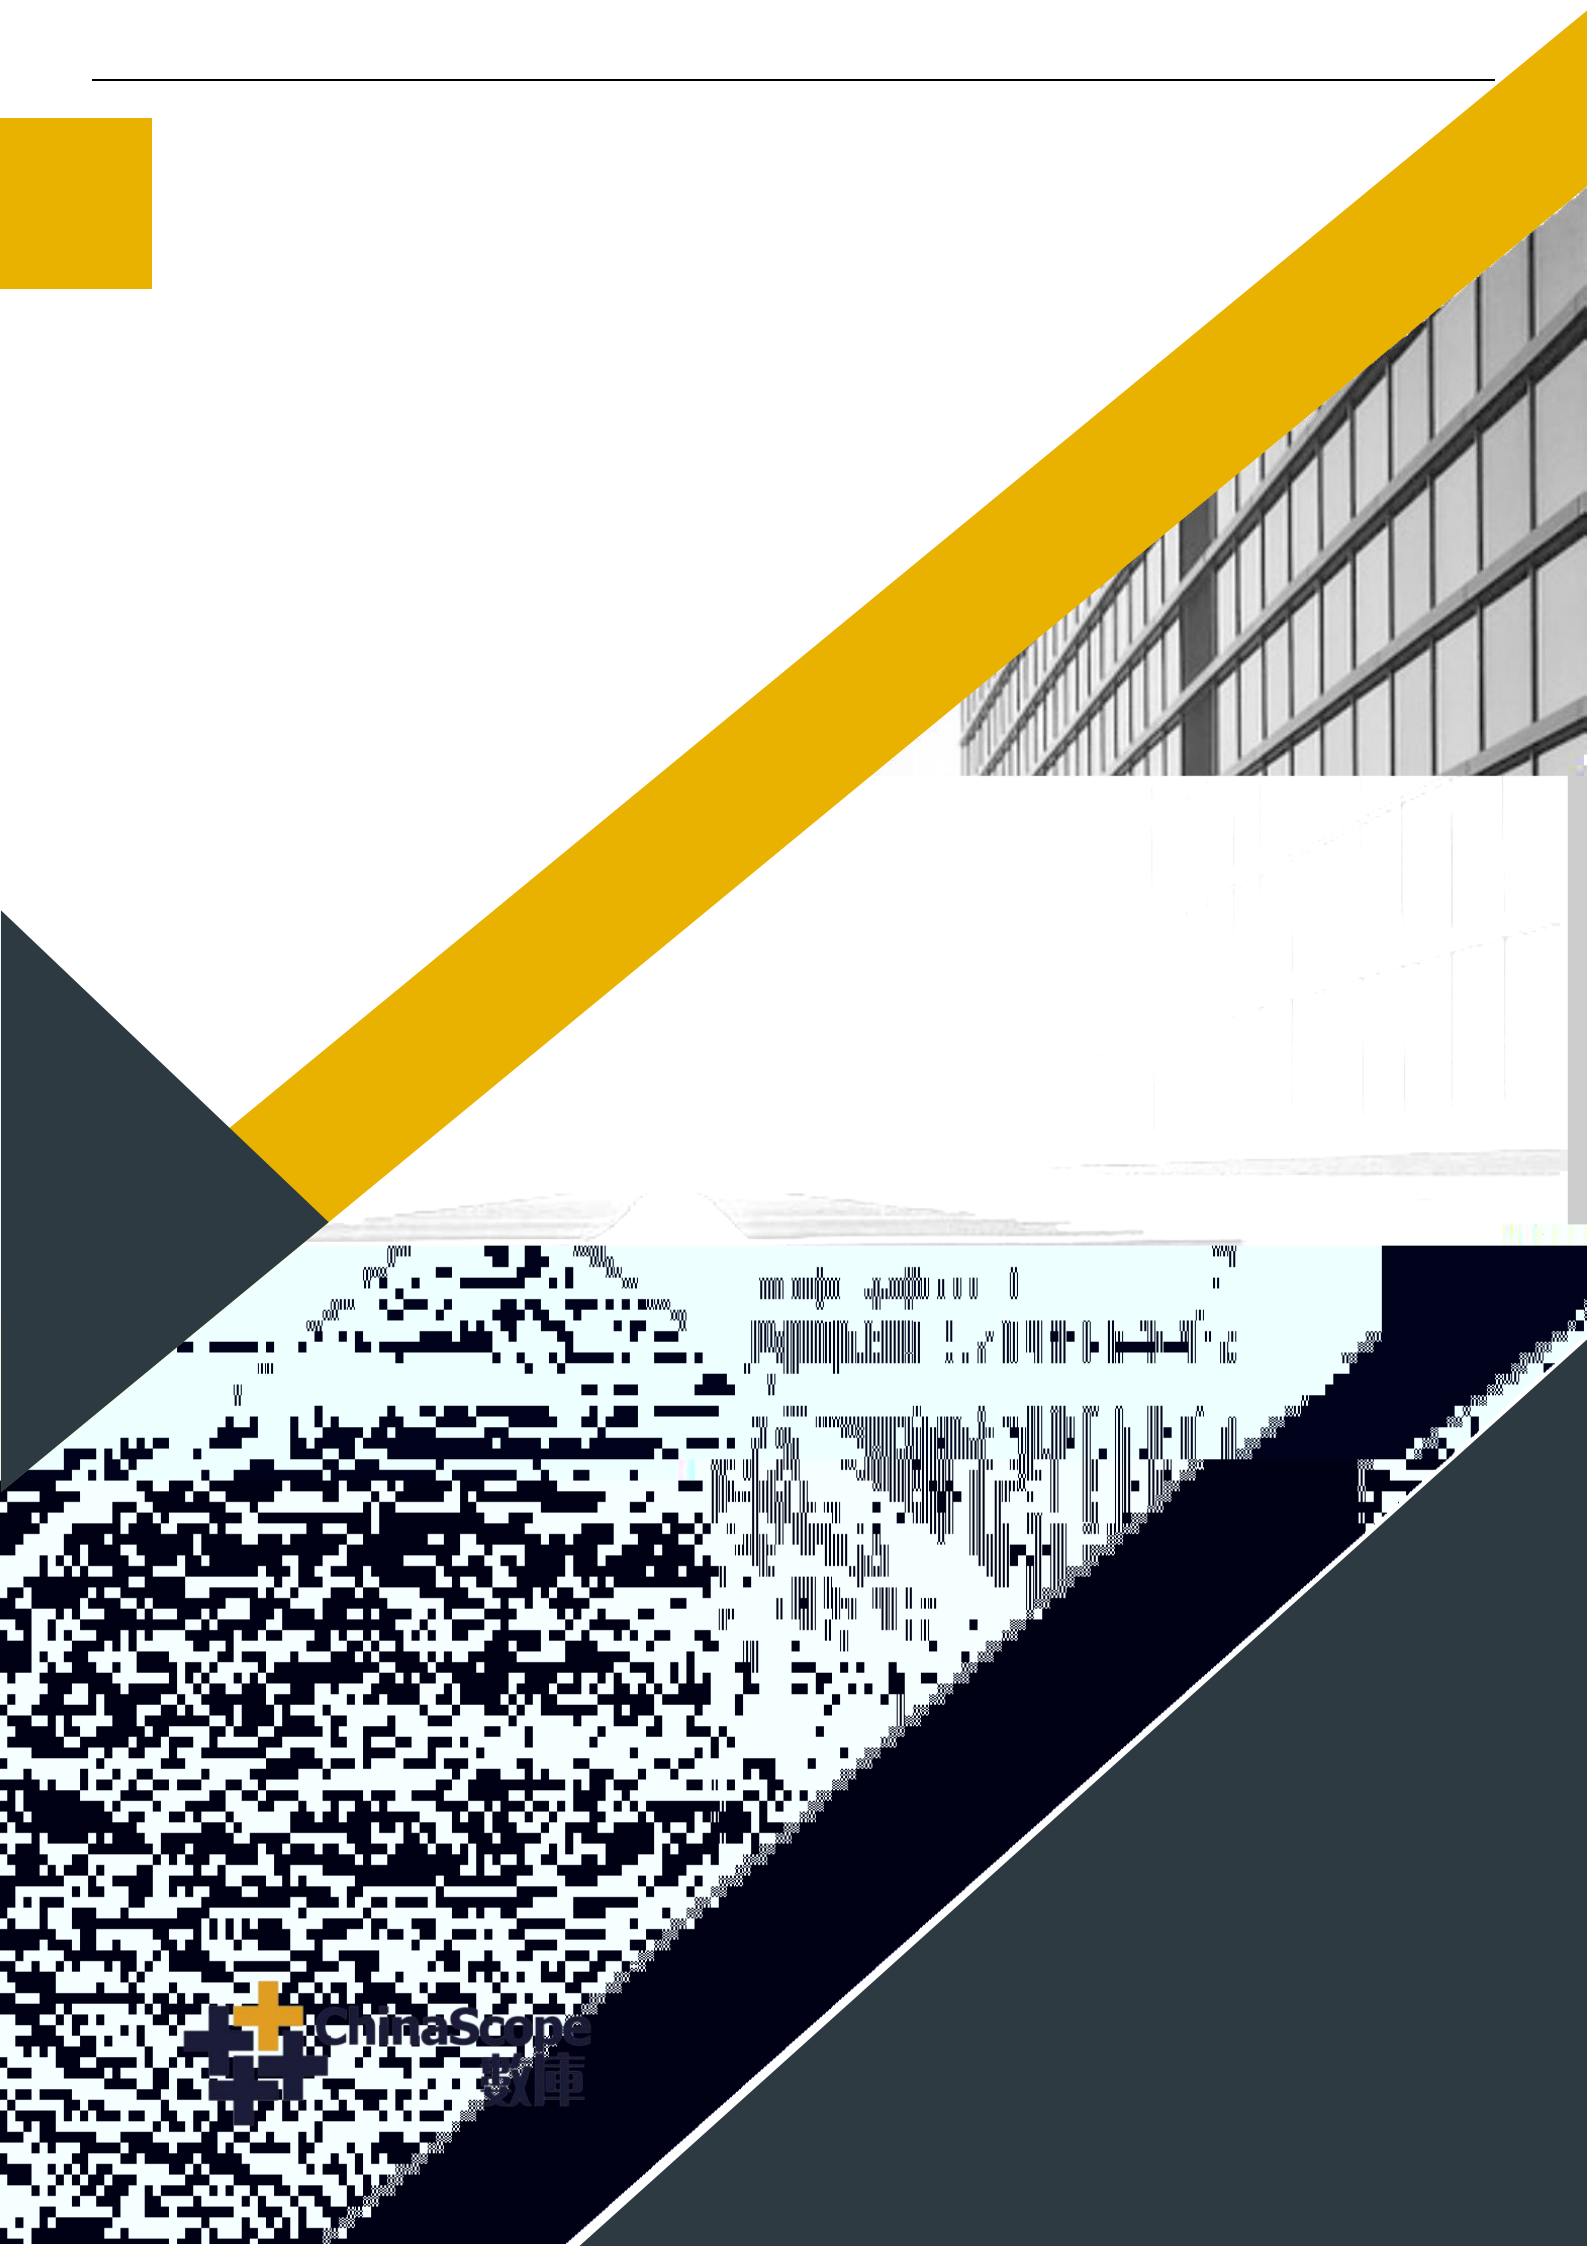

NEWS

--

--

1							37
		100+		1000+			
2		5					
3							

1		NLP					
	Smart-Tag						
2	Smart-Tag						
3	Smart-Tag						
4	Smart-Tag						
5	Smart-Tag						

标签统计	公司	行业	产品	概念	事件	人物	情感
数量	275,250	115	2,868	241	1,821	437,876	0/1/2
NA	召回率	100%	98.67%	99.19%	93.07%	95%	87.69%

1							
2							
3	Smart-Tag		-				

FTP AWS S3
txt JSON

A

-

11109964

857

[-

AUD
-

AIPO

A

[

-

-

-


A

U

D

[illegible]

					i d
					i d





()

[news_company_label] -

					i d
					—
					I d
				0/ 1/ 2	1: 0: 2:

					-
					Id
					:
				0 1 2	

```
[ news_industry_label ] -
```

					—
					Id
					:
					0 1 2

[news_product_label] -

					—
					Id
					:
					0 1 2

[news_info] -

					Id
					newsTitle_cn
					newsTitle_cn null
					1- 0-
					Id
					:



[news_event_entity]- -

					-
					Id
					Company Per son
					: 0 1 2

[news_people_label] -

[illegible]

[news_r egi on_l abel] -

					—
					Id
					:
					0 1 2

JSON

PYTHON

python

Class NewsResult()

,

class NewsInfo():

class EmotionInfo():

class NewsTag():

python

_V3.4.pdf

1. with open(file_path, 'r', encoding='utf-8') as fp:
 for num,i in enumerate(fp):

2. python

 rawNews = json.loads(i.strip(),strict=False)

3. python class NewsInfo(), class EmotionInfo() class NewsTag()

newsInfo = NewsInfo(**(rawNews.get("newsInfo")))

tags = []

if rawNews.get('newsTags', []):

for tag in rawNews.get('newsTags'):

newstag = NewsTag(**(tag))

tags.append(newstag)

emotions = []

4. Class NewsResult() python

newsResult = NewsResult(newsInfo, tags, emotions)

PYTHON

- python(<https://www.python.org/> python) python

